# INSTRUCTIONS

-J04082 REV. 2008-07-15

# SECURITY SYSTEM KITS

## GENERAL

### Kit Number

68200-07, 68207-07, 69721-07, 69722-07, 91684-08

### Models

For model fitment information, see the P&A Retail Catalog or the Parts and Accessories section of www.harley-davidson.com (English only).

### Additional Parts Required

**FL Touring models** equipped with a TLE/ TLE Ultra Sidecar will require the additional installation of a Bank Angle Switch Kit (88115-03) and is available for separate purchase. See a Harley-Davidson dealer.

*NOTE*

*This instruction sheet references service manual and electrical diagnostic manual information. A service manual and an electrical diagnostic manual are required for this installation and are available from a Harley-Davidson dealer.*

### Kit Contents

See Figure 1 and Table 1.

## INSTALLATION

1. Remove the original equipment (OE) turn signal module (TSM) following the instructions in the service manual.
2. Install the **new** turn signal/ security module (TSSM) from this kit, following the instructions in the service manual.
3. Perform the tests described under TSM/ TSSM VEHICLE DELIVERY in the electrical diagnostic manual.

**⚠WARNING**

**Be sure that all lights and switches operate properly before operating motorcycle. Low visibility of rider can result in death or serious injury. (00316a)**

## ACTUATION

1. See a Harley-Davidson dealer to actuate the key fob to the TSSM.

## SIDECAR CONFIGURATION (FL TOURING MODELS ONLY)

**⚠WARNING**

**Only Touring Harley-Davidson Motorcycles are suitable for sidecar use. Consult a Harley-Davidson dealer. Use of motorcycles other than Touring models with sidecars could result in death or serious injury. (00040a)**

*NOTES*

*FL Touring Models equipped with TLE/TLE-Ultra Sidecar require the use of Bank Angle Sensor (88115-03). Failure to install and configure Bank Angle Sensor may result in death or serious injury.*

*Sidecar configuration of the security system requires the use of a Digital Technician Instrument with either a data link connector or diagnostic interface harness. Consult your Harley-Davidson dealer or the sidecar service manual for complete details.*

On vehicles equipped with a sidecar, the security system **must be reconfigured** from the default solo vehicle setting to the sidecar setting.

- If the sidecar is later removed from the vehicle, the security system **must be reconfigured** from the sidecar setting to the solo vehicle setting.
- If a sidecar is added to the vehicle at a later date, the security system **must be reconfigured** from the solo vehicle setting to the sidecar setting and **will require installation** of the Bank Angle Sensor Switch Kit.

## SERVICE PARTS

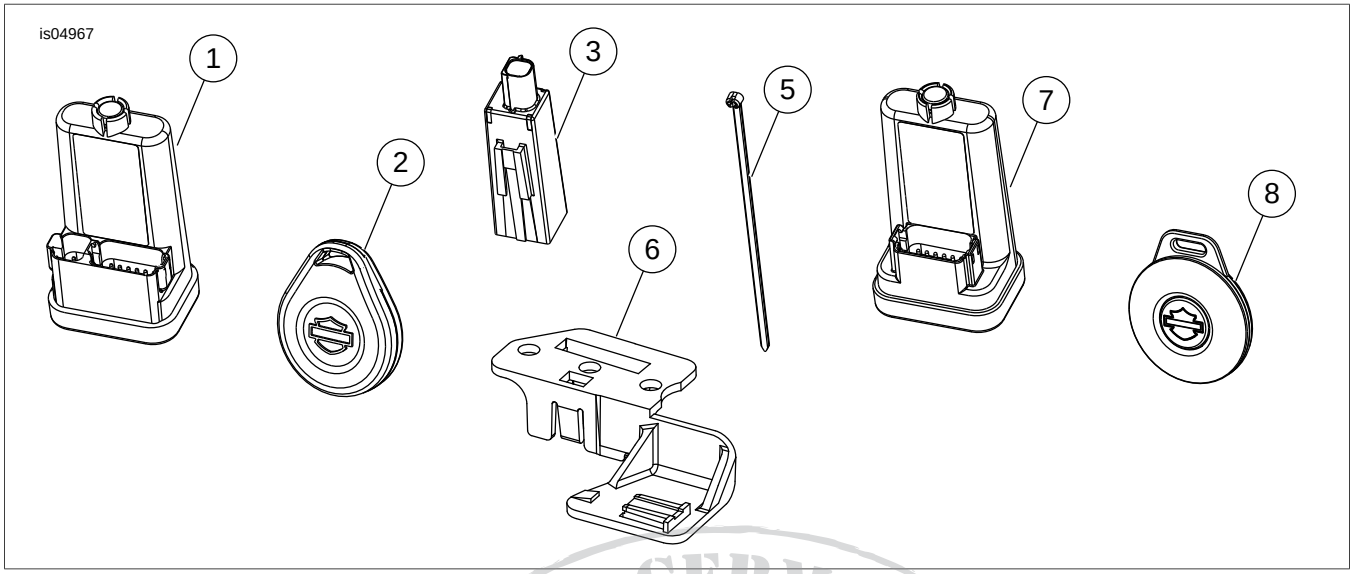


**Figure 1. Service Parts: Security System Kits**

**Table 1. Security System Kits**

| Kit | Item | Description (Quantity) | Part Number |
|---|---|---|---|
| Kit 68200-07 | 1 | Module, security system | 68924-07 |
| | 2 | Smart security system key fob | 68926-07 |
| | 3 | Antenna module | 68956-07 |
| | 4 | Antenna jumper harness (not shown) | 70617-07 |
| | 5 | Cable strap (2) | 10065 |
| Kit 68207-07 | 1 | Module, security system | 68925-07 |
| | 2 | Smart security system key fob | 68926-07 |
| | 3 | Antenna module | 68956-07 |
| | 4 | Antenna jumper harness (not shown) | 70617-07 |
| | 6 | Antenna mount | 70401-07 |
| Kit 91684-08 | 1 | Module, security system | 69976-08 |
| | 2 | Smart security system key fob | 68926-07 |
| | 3 | Antenna module | 68956-07 |
| | 4 | Antenna jumper harness (not shown) | 70617-07 |
| Kit 69721-07 | 7 | Module, security system | 68922-07 |
| | 8 | Smart security system key fob | 68939-00 |
| Kit 69722-07 | 7 | Module, security system | 68923-07 |
| | 8 | Smart security system key fob | 68939-00 |